


CRIPPEN GX-3 Series

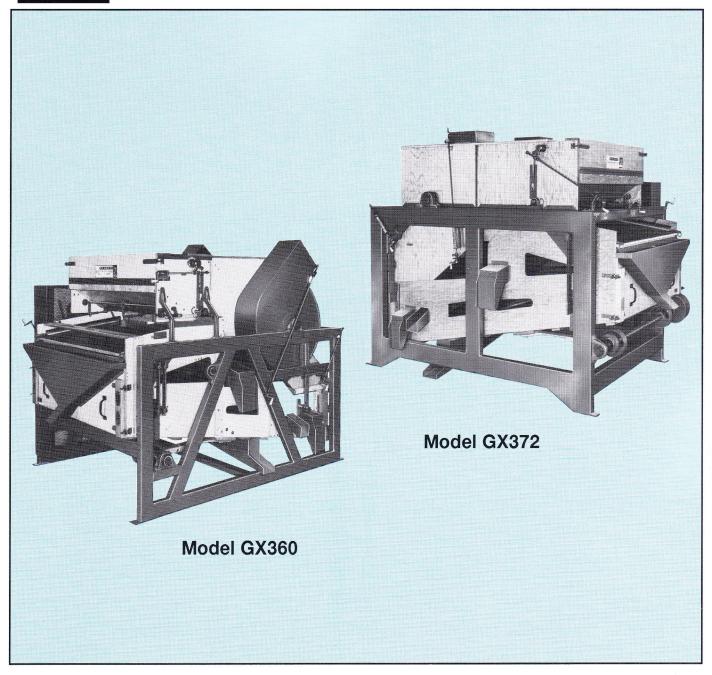

Features

- Exclusive Over-the-Top Rollfeed hopper. Allows trashy material coming to the hopper with grain to feed through the hopper without disturbing the rate of feed.
- Adjustable speed of screen shake Offers close control of seed flow on the screens and can compensate for varying seed conditions giving you maximum screening efficiency.
- Ball tray screen cleaning system Ball trays are not attached to the screens, so changing screens is still an easy, one-man operation. Change screens without disturbing the ball trays.
- Compact design For the capacity you will get, a very small floor space is required.
- Two air separations Improve your cleaning operation. One air separation at the feed hopper, the other following the screens. Each fan is independent of the other. Each fan has its own adjustment for precision air work on the seed and a scale indicator on the control rod for easy reference for fan adjustment.
- All spouts 100% self-cleaning.
- Rugged, clean-cut, all-steel frame.

For certified seed cleaning, custom or market cleaning, the GX-3 series gives you excellent cleaning capacity and top quality conditioning on all kinds of seeds. The GX-3 series has 3 screens and 2 air separations.

Crippen's exclusive feed hopper will deliver the uncleaned commodity without any damage to the seed. The two fans are independently adjusted for just the right amount of air lift to make precision separations by air. The adjustable speed screen shake gives you close control of the seed-flow on the screens for maximum screening efficiency.


The GX-3 series take up a small amount of floor space for the large amount of work they can deliver. The design is clean-cut and functional, with easy to use controls located conveniently on the delivery side, and front end. Either unit will fit into a smaller area than any other machine for the capacity and performance.

Screens are quickly and easily changed from the front end of the machine. When you change a screen, one man can do the job just like you have always done in the past. Crippen ball trays are separate from the screens, and stay in position until you wish to remove them.

All spouts on the GX-3 series are 100% self cleaning. No augers are used to carry the screenings to the side, so maintenance on auger parts and housings is eliminated.

Seed visibility on the screens is an important feature for the operator. On the GX-3 series you can visually inspect the seed as it is moving, on all 3 screens. Visual inspection of seed-flow determines in most cases whether to make an adjustment either in the rate of feed or the speed of the shaker shaft.

You will find the GX-3 series to be a smooth running, extremely low maintenance machine, that will give years of quality conditioning to your seed.



SPECIFICATIONS*

	GX-360-5*	GX-372*
Height to hopper inlet	5'10"	6'7"
Length overall, less motor	7'8"	8'10"
Width-including drive guards	6'5"	6'5"
Capacity-grain, beans, corn bu/hr	150-400	200-500
Capacity-fine seeds, bu/hr	75-125	100-175
Fan Speed, RPM	1100	1100
H.P. Required	7 1/2	7 1/2
Shipping Weight, approximately, lbs.	2800	3200

Note: Capacities show the general cleaning range. For precision conditioning to maximize seed quality capacities are at the lower end of the range, depending on impurities to be removed and the desired quality of the finished seed.

- •The GX-360-4 takes 42" width screens. The GX-360-5 takes 54" width screens.
- *The GX-372-4 takes 42" width screens. The GX-372-5 takes 54" width screens.



P.O. BOX 152 1311 162ND Ave. NE Buxton, ND 58218 P (701) 847-3125 F (701) 847-2157 www.bjerkebrothersinc.com



UNIT 8 – 851 Lagimodiere Blvd. Winnipeg, Manitoba Canada R2J 3K4 P (204) 925-6141 F (204) 925-6144 www.crippennorthlandsuperior.com